


CLICK FLOW




Management & Distribution Boxes

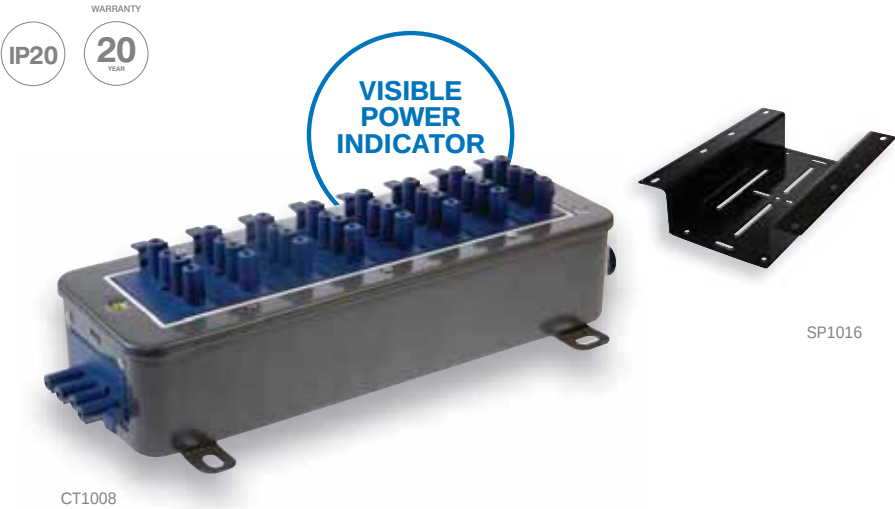

CODE	DESCRIPTION
CT1008	20A 8 Way Distribution Box
SP1016	Mounting Tray For CT1016 & CT1008

PRODUCT INFO	
Input Voltage (V~)	240
Input Frequency (Hz)	50
Total Output Maximum (A)	20
Operating Temperature Range (°C)	-5 to +40

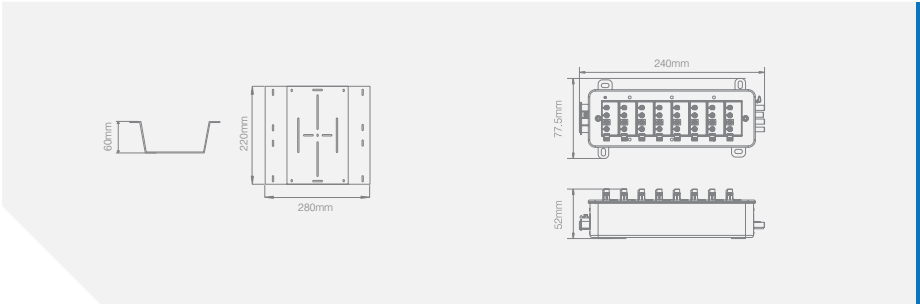

Additional 4 Pole Output Supplied

PRODUCT APPROVALS
BS 8488, BS EN 61535, BS 5733




Management & Distribution Boxes



PRODUCT INFO	
Input Voltage (V~)	240
Input Frequency (Hz)	50
Total Output Maximum (A)	20
Operating Temperature Range (°C)	-5 to +40

CODE	DESCRIPTION
CT1016	20A 16 Way Lighting Management Box
SP1016	Mounting Tray For CT1016 & CT1008

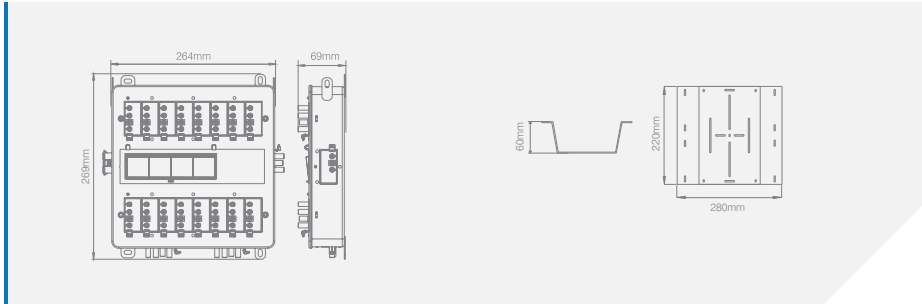

PRODUCT APPROVALS
BS 8488, BS EN 61535, BS 5733

Connector Supplied: 3 Pole (Input), 2 x 4 Pole (Switch Inputs)



Hubs & Splitters

Switch Adaptors

WARRANTY
IP20 **20**
YEAR

WARRANTY
20 **IP20**
YEAR





CODE	DESCRIPTION
CT300	20A 4 Pole (1 in 3 Out) Flow™ Hub Junction Box
CT350	20A 4 Pole Splitter (1 in 2 Out)
CT355	20A 4 Pole (1 in 2 Out) Compact Splitter

PRODUCT INFO	
Input Voltage (V~)	250
Input Frequency (Hz)	50
Total Output Maximum (A)	20
Operating Temperature Range (°C)	-5 to +40

PRODUCT INFO	
Input Voltage (V~)	250
Input Frequency (Hz)	50
Terminal Size (mm)	Ø4.2
Total Output Maximum (A)	20
Terminal Capacity - Flex (mm²)	3 x 1.5
Terminal Capacity - Solid (mm²)	3 x 2.5
Operating Temperature Range (°C)	-5 to +40

CODE	DESCRIPTION
CT1300	20A 3 Pole Switch Adaptor
CT2300	20A 4 Pole Switch Adaptor with pre-wired earth and neutral links

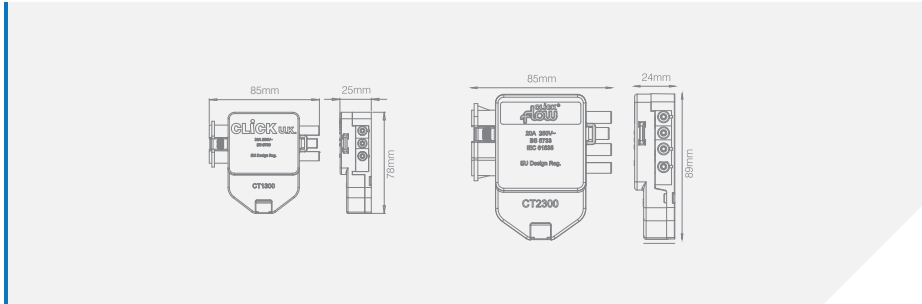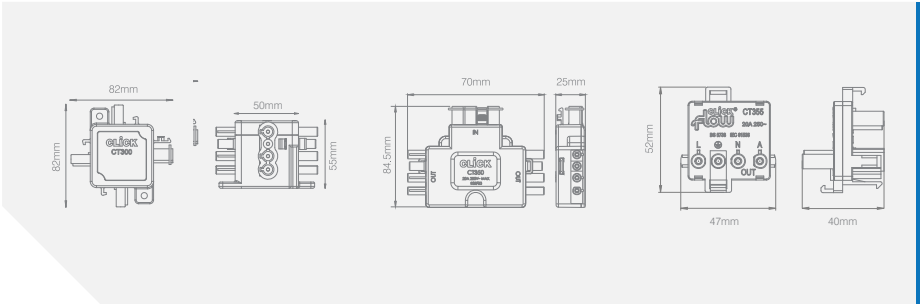

3 Pole Push-Fit Connectors

WARRANTY
IP20 **20**
YEAR



CT105F




CT105M



CT115F

CODE	DESCRIPTION	PRODUCT INFO
CT105F	20A 3 Pole Female Push-Fit Connector	Input Voltage (V~) 250
CT105M	20A 3 Pole Male Push-Fit Connector	Input Frequency (Hz) 50
CT115F	20A 3 Pole Female Push-Fit Connector With Loop	Rated Impulse Voltage (kV) 4
		Total Output Maximum (A) 20
		Terminal Capacity - Flex (mm²) 2.5 (Max.)
		Terminal Capacity - Solid (mm²) 2.5 (Max.)
		Operating Temperature Range (°C) -5 to +40

TIME SAVING LEVERS
Simply push lever down, offer stripped conductor into the terminal & then release the lever, ensuring the cable cannot easily be pulled out.

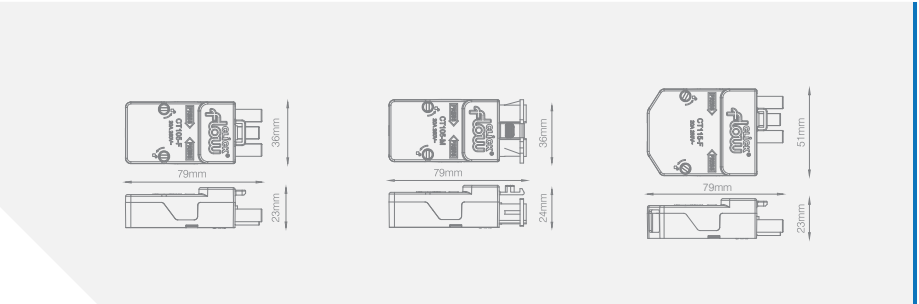

PRODUCT APPROVALS

BS EN 61535

3 Pole Push-Fit Connectors

WARRANTY
20 **IP20**
YEAR




CT105C



CT115C

PRODUCT INFO	CODE	DESCRIPTION
Input Voltage (V~) 250	CT105C	20A 3 Pole Complete Push-Fit Connector (CT105M & CT105F)
Input Frequency (Hz) 50	CT115C	20A 3 Pole Complete Push-Fit Connector With Loop (CT105M & CT115F)
Rated Impulse Voltage (kV) 4		
Total Output Maximum (A) 20		
Terminal Capacity - Flex (mm²) 2.5 (Max.)		
Terminal Capacity - Solid (mm²) 2.5 (Max.)		
Operating Temperature Range (°C) -5 to +40		

TIME SAVING LEVERS
Simply push lever down, offer stripped conductor into the terminal & then release the lever, ensuring the cable cannot easily be pulled out.

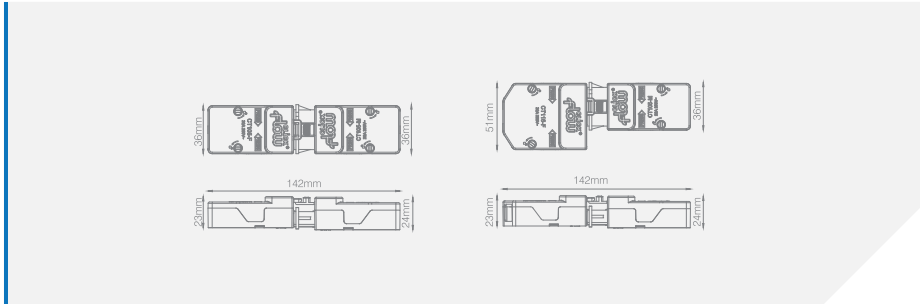

PRODUCT APPROVALS


BS EN 61535

4 Pole Push-Fit Connectors


WARRANTY

IP20

20
YEAR



CT205F




CT205M



CT215F

CODE	DESCRIPTION	PRODUCT INFO
CT205F	20A 4 Pole Female Push-Fit Connector	Input Voltage (V~) 250
CT205M	20A 4 Pole Male Push-Fit Connector	Input Frequency (Hz) 50
CT215F	20A 4 Pole Female Push-Fit Connector With Loop	Rated Impulse Voltage (kV) 4
		Total Output Maximum (A) 20
		Terminal Capacity - Flex (mm²) 2.5 (Max.)
		Terminal Capacity - Solid (mm²) 2.5 (Max.)
		Operating Temperature Range (°C) -5 to +40

TIME SAVING LEVERS
Simply push lever down, offer stripped conductor into the terminal & then release the lever, ensuring the cable cannot easily be pulled out.

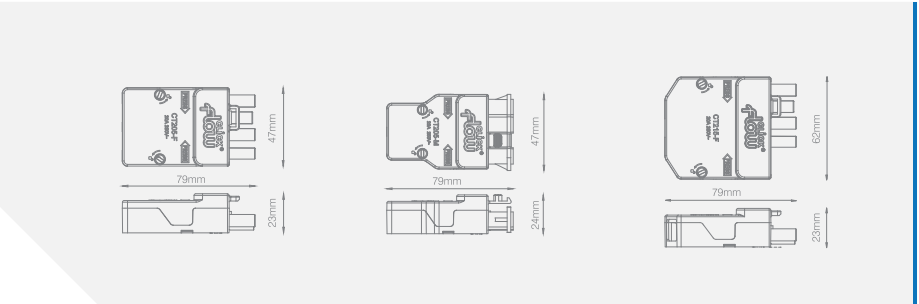

PRODUCT APPROVALS

BS EN 61535



4 Pole Push-Fit Connectors

WARRANTY

20
YEAR

IP20




CT205C



CT215C

PRODUCT INFO	CODE	DESCRIPTION
Input Voltage (V~) 250	CT205C	20A 4 Pole Complete Push-Fit Connector (CT205M & CT205F)
Input Frequency (Hz) 50	CT215C	20A 4 Pole Complete Push-Fit Connector With Loop (CT205M & CT215F)
Rated Impulse Voltage (kV) 4		
Total Output Maximum (A) 20		
Terminal Capacity - Flex (mm²) 2.5 (Max.)		
Terminal Capacity - Solid (mm²) 2.5 (Max.)		
Operating Temperature Range (°C) -5 to +40		

TIME SAVING LEVERS
Simply push lever down, offer stripped conductor into the terminal & then release the lever, ensuring the cable cannot easily be pulled out.

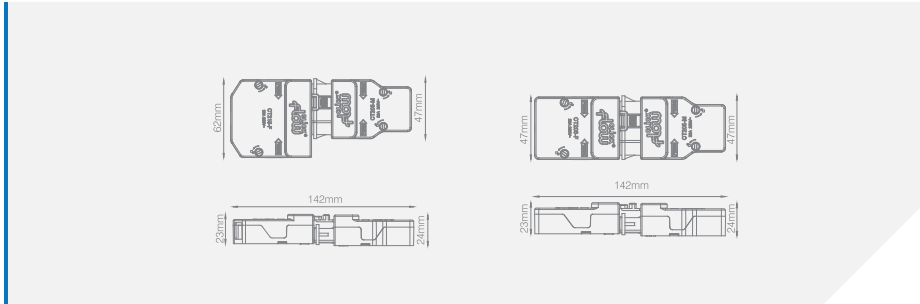

PRODUCT APPROVALS

BS EN 61535




3 Pole Connectors

WARRANTY
IP20 20 YEAR



CODE	DESCRIPTION	PRODUCT INFO
CT101C	20A 3 Pole Connector	Input Voltage (V~) 250
CT102C	20A 3 Pole Connector Screw-Down Cord Grip	Input Frequency (Hz) 50
CT103C	20A 3 Pole Connector Fast-Fit Cord Grip	Rated Impulse Voltage (kV) 4
CT103M	20A 3 Pole Fast-Fit Cord Grip (Male Connector Only)	Terminal Size (mm) Ø4.2
		Total Output Maximum (A) 20
		Terminal Capacity - Flex (mm²) 3 x 1.5
		Terminal Capacity - Solid (mm²) 3 x 2.5
		Operating Temperature Range (°C) -5 to +40

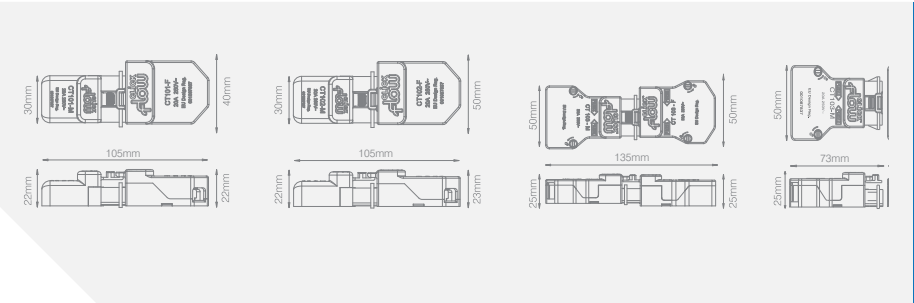


PRODUCT APPROVALS
CT101C: BS 5733
BS EN 61535, BS 5733




4 Pole Connectors

WARRANTY
20 YEAR IP20

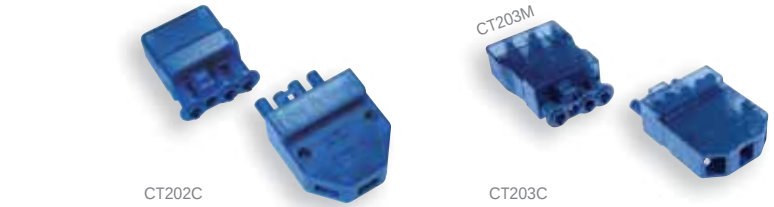

PRODUCT INFO	CODE	DESCRIPTION
Input Voltage (V~) 250	CT202C	20A 4 Pole Connector Screw-Down Cord Grip
Input Frequency (Hz) 50	CT203C	20A 4 Pole Connector Fast-Fit Cord Grip
Rated Impulse Voltage (kV) 4	CT203M	20A 4 Pole Fast-Fit Cord Grip (Male Connector Only)
Terminal Size (mm) Ø4.2		
Total Output Maximum (A) 20		
Terminal Capacity - Flex (mm²) 3 x 1.5		
Terminal Capacity - Solid (mm²) 3 x 2.5		
Operating Temperature Range (°C) -5 to +40		

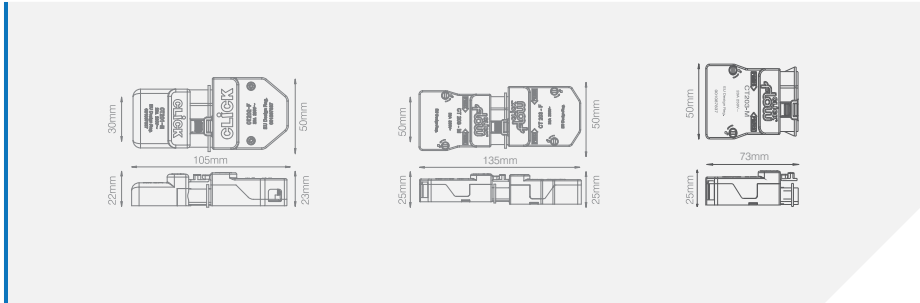

PRODUCT APPROVALS
BS EN 61535, BS 5733



Pre-Wired LSZH Link Cables, Male connectors to F/E

Extension Cables

WARRANTY

IP20

20
YEAR



CODE	DESCRIPTION	PRODUCT INFO
CT732	6A 3 Pole 0.75mm LSZH To FE 2m - Black	Input Voltage (V~) 250
CT733	6A 3 Pole 0.75mm LSZH To FE 3m - Black	Input Frequency (Hz) 50
CT735	6A 3 Pole 0.75mm LSZH To FE 5m - Black	Total Output Maximum (A) 6 & 20
CT742	6A 4 Pole 0.75mm LSZH To FE 2m - Black	Operating Temperature Range (°C) -5 to +40
CT743	6A 4 Pole 0.75mm LSZH To FE 3m - Black	
CT745	6A 4 Pole 0.75mm LSZH To FE 5m - Black	
CT845	20A 4 Pole 2.5mm Male To Female LSZH 5m - Black	

WARRANTY

20
YEAR

IP20



PRODUCT INFO	CODE	DESCRIPTION
Input Voltage (V~) 250	CT802	6A 4 Pole PVC Extension Cable - 2 Metre
Input Frequency (Hz) 50	CT803	6A 4 Pole PVC Extension Cable - 3 Metre
Total Output Maximum (A) 6	CT805	6A 4 Pole PVC Extension Cable - 5 Metre
Operating Temperature Range (°C) -5 to +40		

Ceiling Rose





CT1400



CT1401

CODE	DESCRIPTION	PRODUCT INFO
CT1400	20A 4 Pole Ceiling Rose (Without Cover)	Input Voltage (V~) 250
CT1401	CT1400 Ceiling Rose Cover	Input Frequency (Hz) 50
CT101C, CT102C, CT202C compatible with rose cover installed		Rated Impulse Voltage (kV) 4
When rose cover installed, not suitable for use with CT103, CT203 or Push Fit Connectors		Terminal Size (mm) Ø4.2
		Total Output Maximum (A) 20
		Terminal Capacity - Flex (mm²) 3 x 1.5
		Terminal Capacity - Solid (mm²) 3 x 2.5
		Operating Temperature Range (°C) -5 to +40



PRODUCT APPROVALS

CT1401: BS 8488, BS EN 61535, BS 5733

