



Premium Decorative
Wiring Accessories

deco  PLUS





Premium Decorative Wiring Accessories


A comprehensive range of premium decorative metal wiring accessories is now available under the Deco Plus® brand. A brand that is synonymous with high specification, exceptional quality and unprecedented value.

The smooth contemporary curves of the Deco Plus® range are available in seven finishes to complement any room.

Each product is supplied individually packaged in its own distinctive printed box complete with full fitting instructions.

Deco Plus® switches feature the same modular switch design as our moulded ranges. All of the switch modules featured in our Minigrid® brochure can therefore be used in any combination on Deco Plus® accessories.

All Deco Plus® 13A sockets and fused connection units are tested and approved to BS1363 offering assured quality and safety.

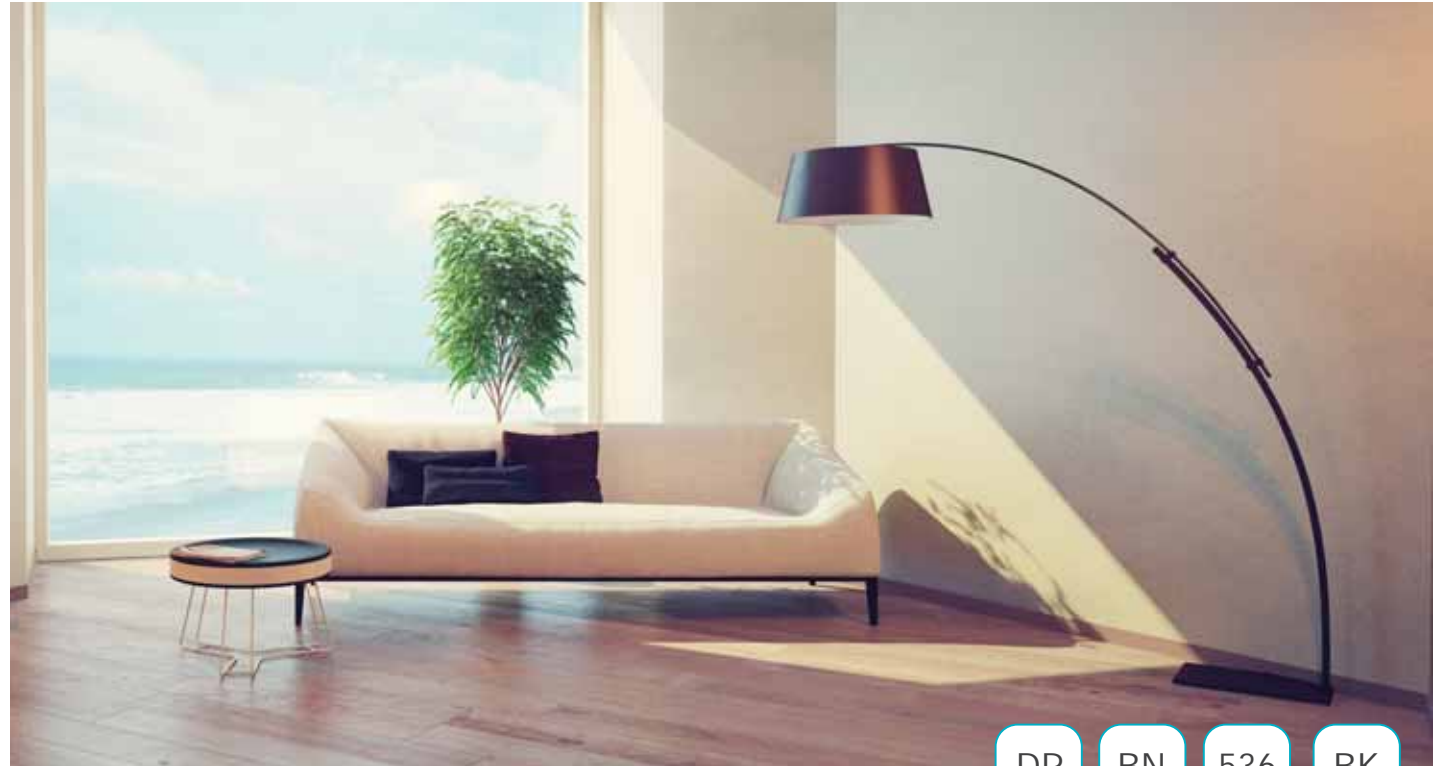

Antique Brass* (AB)



Satin Brass* (SB)



Satin Chrome* (SC)



Black Nickel (BN)



Stainless Steel (SS)



Polished Chrome (CH)



Polished Brass (BR)

All Deco Plus® products featured in the pages of this brochure are available in seven distinctive quality finishes.

All Deco Plus® products are available with Black or White Inserts.

(Excluding Antique Brass and Black Nickel finishes, which are supplied with Black Insert and Gasket only).

A selection of Stainless Steel and Satin Chrome finishes are now available with Grey Inserts.

Contents

New Features	C7
Switches	C10
Back Boxes	C19
Power Socket Outlets	C22
Socket & Blank Plates	C24
13A Fused Connection Units	C25
Control Switches	C26
Key Lockable Switch & Socket	C28
Telephone & Data Sockets	C30
TV & Satellite	C31
New Media™ Plates	C33
Yokes & Back Boxes	C34

Plate Style	Product Finish	Product Number	Insert Colour
-------------	----------------	----------------	---------------

Deco® Plus unique product codes

When ordering any Deco® Plus products, please specify the required finish by following the simple code structure as demonstrated above.

AHEAD OF THE
CURVE





New Features

...plus so much more

Attention to detail has been at the forefront of the design process for our newest range of wiring accessories. All aspects, no matter how small, have been taken into account and collectively create the elegant style that characterises Deco Plus®.



Every accessory within the range which contains a neon now has an insert surrounding the lens of the neon.



An attractive feature added to the Deco Plus® range is the profile of the cooker sockets. Instead of the traditional T-bar shape, our new range matches the profile of our ingot sockets.

Switches

All Deco Plus® switches are supplied complete with requisite switch module(s). However, should local conditions dictate, the installer may customise a switch arrangement by substituting switch modules by means of a simple, single fixing screw.

A comprehensive range of available modules is illustrated in our dedicated Minigrid® brochure.

Unfurnished mounting plates can be ordered separately and furnished with whatever selection of switch modules may be required.

All Deco Plus® switch plates are modular as standard, allowing you to create virtually any switch plate you require.



Modular Ingot Plate Switches | Toggle Switches
Dimmer Switches

MINIGRID®

Please see page K18 for a selection of Minigrid® modules.



MINIGRID® Switch modules interchangeable with MiniGrid® Modules.
For the complete range of MiniGrid® modules, see page K18.

Ingot Plates Switches - MiniGrid®

- 411 10AX Ingot 1 Gang 2 Way Plate Switch
- 412 10AX Ingot 2 Gang 2 Way Plate Switch
- 413 10AX Ingot 3 Gang 2 Way Plate Switch
- 414 10AX Ingot 4 Gang 2 Way Plate Switch
- 416 10AX Ingot 6 Gang 2 Way Plate Switch
- 425 10AX Ingot 1 Gang Intermediate Plate Switch

Standards: BS EN 60669-1
Back Box Depth (mm): 1 Gang: 16 2 Gang: 25
Cable Size (mm²): 4 x 1.5 or 2 x 2.5
Dimensions (mm): 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D)

Understanding the code: Please note: AB & BN are only available with Black inserts. SC & SS Ingot are available with Grey Inserts
DP - Plate Style BN - Plate Finish 536 - Product No. BK - Insert Colour
AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, BN Black Nickel, SS Stainless Steel.



MINIGRID® For the complete range of MiniGrid® modules, see page K18.

Unfurnished Plates - MiniGrid®

- 401 1 Gang MiniGrid® Unfurnished Plate - 1 Aperture
- 402 1 Gang MiniGrid® Unfurnished Plate - 2 Apertures
- 403 1 Gang MiniGrid® Unfurnished Plate - 3 Apertures
- 404 2 Gang MiniGrid® Unfurnished Plate - 2 x 2 Apertures
- 406 2 Gang MiniGrid® Unfurnished Plate - 2 x 3 Apertures
- 426 2 Gang MiniGrid® Unfurnished Plate - 6 In-Line Apertures

Architrave Unfurnished Plates - MiniGrid®

- 471 1 Gang MiniGrid® Unfurnished Architrave Plate - 1 Aperture
 - 472 2 Gang MiniGrid® Unfurnished Architrave Plate - 2 Apertures
- These plates must be used with the architrave back boxes WA671 / WA672 and can only be flush mounted.
Not compatible with MD070 & MD075 Switch modules.

Standards: BS 5733
Back Box Depth (mm): Dependent On Module Fitted
Dimensions (mm): 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D)
Single architrave: 35 (W) x 88 (H) x 8 (D) Twin architrave: 35 (W) x 150 (H) x 8 (D)

Understanding the code: Please note: AB & BN are only available with Black inserts. SC & SS Ingot are available with Grey Inserts
DP - Plate Style BN - Plate Finish 536 - Product No. BK - Insert Colour
AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, BN Black Nickel, SS Stainless Steel.



421



422



MD9125



423



424

MD9125 Intermediate module available.

Satin Chrome & Stainless Steel plate finishes require the use of a Pearl Nickel (PN) Toggle Switch Module. Not interchangeable with dimmers or other MiniGrid® modules.

Toggle Switches

- 421 10AX 1 Gang 2 Way Toggle Switch
- 422 10AX 2 Gang 2 Way Toggle Switch
- 423 10AX 3 Gang 2 Way Toggle Switch
- 424 10AX 4 Gang 2 Way Toggle Switch

10AX Intermediate Toggle Switch Modules

- MD9125AB Intermediate Toggle Switch Module - Antique Brass
- MD9125BN Intermediate Toggle Switch Module - Black Nickel
- MD9125BR Intermediate Toggle Switch Module - Polished Brass
- MD9125CH Intermediate Toggle Switch Module - Polished Chrome
- MD9125PN Intermediate Toggle Switch Module - Pearl Nickel

Toggle Modules only fit in existing toggle plates

Standards: BS EN 60669-1

Back Box Depth (mm): 25 Cable Size (mm²): 4 x 1.5 or 2 x 2.5

Dimensions (mm): 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D) Modules: 25 (W) x 62 (H) x 22 (D)

Understanding the code:

DP - Plate Style BN - Plate Finish 536 - Product No.

AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, BN Black Nickel, SS Stainless Steel.

Toggle Switches & Dimming

A wide selection of toggle switches and dimmers for within your home.



140 | 161



153 | 163



154 | 164



MINIGRID®

Interchangeable modules available on page K37. For the complete range of MiniGrid® modules, see the MiniGrid® section.

We recommend the use of branded halogen lamps with all Deco Plus® leading edge dimmers. The use of inferior or non-branded lamps may require the nominal rating of the dimmer to be reduced. These dimmer switches have not been designed to use with LED lamps. However, they may be suitable for some good quality LED lamps. For further information please contact Click® Technical support team.

We recommend the use of branded LED lamps with all Deco Plus® trailing edge dimmers.

Dimmer Switches (Leading Edge)

- 140** 1 Gang 2 Way 400Va Dimmer Switch
- 152** 2 Gang 2 Way 400Va Dimmer Switch
- 153** 3 Gang 2 Way 400Va Dimmer Switch
- 154** 4 Gang 2 Way 400Va Dimmer Switch

Dimmer Switches (Trailing Edge)

- 161** 1 Gang 2 Way 100W Dimmer Switch
- 162** 2 Gang 2 Way 100W Dimmer Switch
- 163** 3 Gang 2 Way 100W Dimmer Switch
- 164** 4 Gang 2 Way 100W Dimmer Switch

Standards: BS EN 60669-1 BS EN 55015 BS EN 61000-3-2 400Va: BS EN 61000-3-3 100W: BS EN 60669-2-1
Type: 400Va: Leading Edge 100W: Trailing Edge
Back Box Depth (mm): 25 **Cable Size (mm²):** 2 x 1.5
Dimensions (mm): 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D)

Understanding the code:
DP - Plate Style **BN** - Plate Finish **536** - Product No.
 AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, BN Black Nickel, SS Stainless Steel.

Dimmer Modules

- MD9001** 6A 2 Way Push On/Off (Non-Dimming) Module (25 x 62mm)
- MD9010** 1-10V Analogue Dimmer Module (25 x 62mm)
- MD9022** 250W 2 Leading Edge Way Dimmer Module (25 x 62mm)
- MD9042** 400W 2 Way Leading Edge Dimmer Module (25 x 62mm)
- MD9014** 100W Dual Mode Dimmer Module with Trim (26.5 x 55mm)

Dimmer M10 Nut Runner

- SP900** Dimmer M10 Nut Runner Tool

Use the nut runner to easily exchange dimmer modules and create customised dimmer switch plate



SP900

MD9014



140PL




152PL



153PL



185

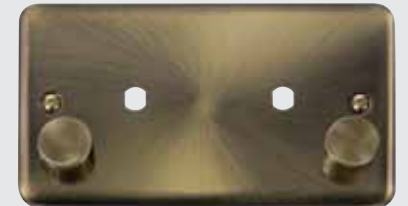

186

The dimmer modules are supplied separately. For recessed wall boxes and longer fixing screws see page N9

Dimmer Mounting Unfurnished Plates

- 140PL** 1 Gang Dimmer Plate & Knob (650W Max) - 1 Aperture
- 152PL** 2 Gang Dimmer Plate & Knobs (800W Max) - 2 Apertures
- 153PL** 3 Gang Dimmer Plate & Knobs (1200W Max) - 3 Apertures
- 154PL** 4 Gang Dimmer Plate & Knobs (1600W Max) - 4 Apertures
- 185** 1 Gang Dimmer Plate & Knob (1000W Max) - 1 Aperture
- 186** 2 Gang Dimmer Plate & Knobs (1630W Max) - 2 Apertures

Standards: BS 5733
Back Box Depth (mm): 25
Dimensions (mm): 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D)

Understanding the code:
DP - Plate Style **BN** - Plate Finish **536** - Product No.
 AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, BN Black Nickel, SS Stainless Steel.

Interchangeable Plates & Modules

Minigrid® modules are interchangeable with pre-assembled plate switches or can be mounted into the unfurnished switch plates throughout the Deco Plus® range.

Standard Minigrid® modules offer simple, single screw fixing to the yoke which greatly facilitates the assembly of up to 18 different switching functions on a single plate.



MINIGRID®

Minigrid® modules are available in the same decorative finishes as the Deco Plus® range as well as white and black, so there are plenty of options available to suit your application.

The furnished plate shown here contains a selection of both single and twin width MiniGrid® modules.
For the full range please see the MiniGrid® section.



512

2 Tier Unfurnished Plates c/w Gaskets - MiniGrid®

512 2 Tier MiniGrid® Unfurnished Plate - 12 Apertures
2 x GR100 Yokes required, see page C19



518

3 Tier Unfurnished Plates c/w Gaskets - MiniGrid®

518 3 Tier MiniGrid® Unfurnished Plate - 18 Apertures
3 x GR100 Yokes required, see page C19

MINIGRID®

If dimmer modules are to be mounted directly above each other, the MD9014 (page K37) or similar height dimmer modules must be installed. Alternatively, retractive switch modules MD004 (page K21) can be used in conjunction with Click Smart+ dimming receivers (page A20).

Standards: BS 5733
Back Box Depth (mm): 47
Dimensions (mm): 512: 146 (W) x 146 (H) x 8 (D) 518: 146 (W) x 227 (H) x 8 (D)

Understanding the code:
DP - Plate Style BN - Plate Finish 536 - Product No.
AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, BN Black Nickel, SS Stainless Steel.

Example of yoke furnished with modules



MINIGRID®

Galvanised steel back boxes supplied for flush mounting of the large MiniGrid® plates. Mounting Yoke facilitates pre-assembly of required modules. Fitted with twin earth terminals.



GR100

WA512

WA518

Yokes

- GR100BK** MiniGrid® Module Yoke - 6 Apertures - Black
- GR100PW** MiniGrid® Module Yoke - 6 Apertures - White
- GR100GY** MiniGrid® Module Yoke - 6 Apertures - Grey

2 or 3 yokes are required based on the backbox selected.

Galvanised Steel Back Boxes

- WA512** 2 Tier 47mm Deep K.O. Box
- WA518** 3 Tier 47mm Deep K.O. Box

Standards: 512 518: BS 4662
Dimensions (mm): 512: 137 (W) x 137 (H) x 47 (D) 518: 137 (W) x 197 (H) x 47 (D) 100: 129 (W) x 55 (H) x 14 (D)


Power Socket Outlets, Fused Connection Units & Control Switches

With the ever increasing demand for power supplies in all areas of the home, comes the problem of selecting and fitting outlets which blend harmoniously with the décor of the room in which they are to be fitted.

The seven different Deco Plus® plate finishes offer a solution for almost every possible design need and will enhance the décor of any area, whether in a kitchen, bedroom, lounge or study etc.

13A Wall Socket Outlets | Round Pin Wall Socket Outlets
Fused Connection Units | Fan Isolation Switches

DP Switches | Sockets with USB outlets
Lockable Switches & Sockets

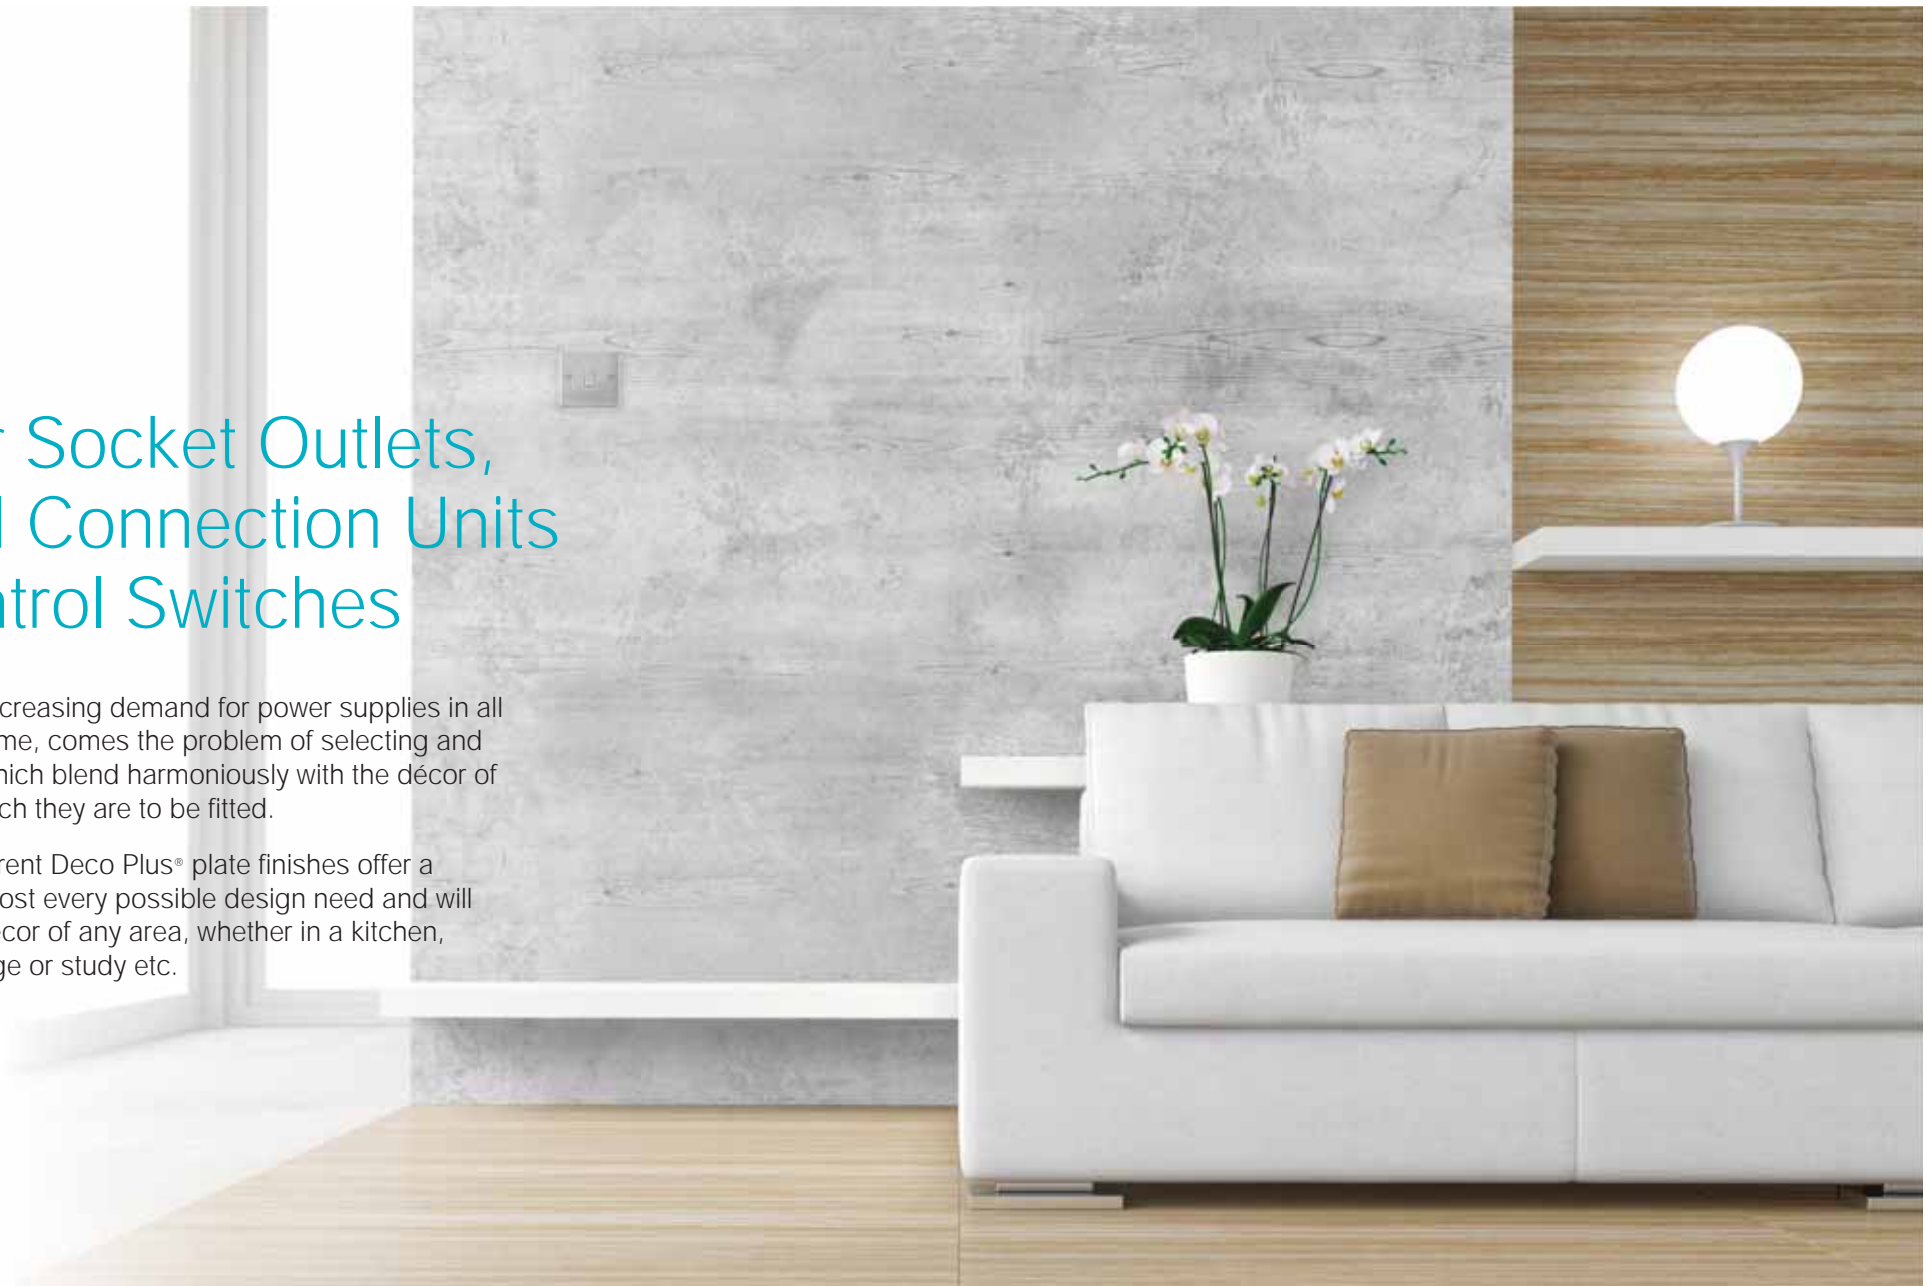

Safety Shutter Sockets (Excluding USB options) are only available for sale in the Republic of Ireland.



535



536



1535



1536

Ingot Switched Socket Outlets

- 535** 13A Ingot 1 Gang DP Switched Socket
- 536** 13A Ingot 2 Gang DP Switched Socket (Twin Earth)
- 1535** 13A Ingot 1 Gang DP 3 Pin Safety Shutter Switched Socket Outlet
- 1536** 13A Ingot 2 Gang DP 3 Pin Safety Shutter Switched Socket Outlet (Twin Earth)



836



1836

Ingot Switched Socket Outlets With Outboard Rockers

- 836** 13A Ingot 2 Gang DP Switched Socket With Outboard Rockers (Twin Earth)
- 1836** 13A Ingot 2 Gang DP 3 Pin Safety Shutter Outboard Switched Socket Outlet (Twin Earth)

Standards: BS 1363-2
Back Box Depth (mm): 25
Cable Size (mm²): 3 x 2.5 or 2 x 4
Dimensions (mm): 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D)

Understanding the code: Please note: AB & BN are only available with Black inserts. SC & SS Ingot are available with Grey Inserts
 DP - Plate Style **BN** - Plate Finish **536** - Product No. **BK** - Insert Colour
 AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, BN Black Nickel, SS Stainless Steel.

Safety Shutter Sockets (Excluding USB options) are only available for sale in the Republic of Ireland.



571U



570



580



586

Ingot Switched Sockets With USB Outlet

- 571U** 13A Ingot 1 Gang Switched Socket With 2.1A USB Outlet (Twin Earth)
- 570** 13A Ingot 2 Gang Switched Socket With 2.1A USB Outlet (Twin Earth)

Ingot Switched Sockets With Twin USB Outlets

- 580** 13A Ingot 2 Gang Switched Socket With Twin 2.1A USB Outlets (4.2A) (Twin Earth)
- 586** 13A Ingot 2 Gang Switched Safety Shutter Socket Outlet With Type A & C USB (4.2A) Outlets (Twin Earth)



038




039

Round Pin Socket Outlets

- 038** 5A Round Pin Socket
- 039** 2A Round Pin Socket

Standards: BS 1363-2: 2016 +A1: 2018 BS EN IEC 62368-1 BS EN 62680-1-1 038 039: BS 546
Back Box Depth (mm): 25 **Cable Size (mm²):** 3 x 2.5 or 2 x 4 038: 4 x 1.5 or 3 x 2.5 039: 3 x 1.5
Dimensions (mm): 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D)

Understanding the code: Please note: AB & BN are only available with Black inserts. SC & SS Ingot are available with Grey Inserts
 DP - Plate Style **BN** - Plate Finish **536** - Product No. **BK** - Insert Colour
 AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, BN Black Nickel, SS Stainless Steel.

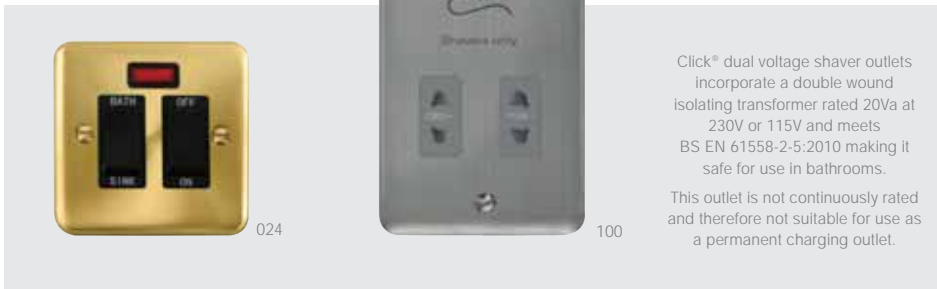

Click® dual voltage shaver outlets incorporate a double wound isolating transformer rated 20Va at 230V or 115V and meets BS EN 61558-2-5:2010 making it safe for use in bathrooms. This outlet is not continuously rated and therefore not suitable for use as a permanent charging outlet.

20A DP Sink/Bath Switch

024 20A DP Sink/Bath Switch With Neon

Dual Voltage Shaver Socket

100 115/230V Dual Voltage Shaver Socket



Blank Plates

060 1 Gang Blank Plate

061 2 Gang Blank Plate

Standards: 024: BS EN 60669-1 060, 601: BS 5733 100: BS EN IEC 61558-1 BS EN 61558-2-5
 Back Box Depth (mm): 024, 061: 25 060: 16 100: 47 Cable Size (mm²): 024: 3 x 2.5 100: 2 x 1.5 or 1 x 2.5
 Dimensions (mm): 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D) 100: 88 (W) x 146 (H) x 8 (D)

Understanding the code: Please note: AB & BN are only available with Black inserts. SC & SS Ingot are available with Grey Inserts
 DP - Plate Style BN - Plate Finish 536 - Product No. BK - Insert Colour
 AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, BN Black Nickel, SS Stainless Steel.



Ingot Fused Connection Units With Optional Flex Outlet

- 550 13A Ingot Fused Connection Unit
- 551 13A Ingot DP Switched Fused Connection Unit
- 552 13A Ingot DP Switched Fused Connection Unit With Neon
- 553 13A Ingot Fused Connection Unit With Neon



Ingot Fused Connection Units Without Flex Outlet

- 750 13A Ingot Fused Connection Unit
- 751 13A Ingot DP Switched Fused Connection Unit
- 752 13A Ingot DP Switched Fused Connection Unit With Neon
- 753 13A Ingot Fused Connection Unit With Neon

Standards: BS 1363-4 BS 1362
 Back Box Depth (mm): 25 Cable Size (mm²): 3 x 2.5 or 2 x 4
 Dimensions (mm): 88 (W) x 88 (H) x 8 (D)

Understanding the code: Please note: AB & BN are only available with Black inserts. SC & SS Ingot are available with Grey Inserts
 DP - Plate Style BN - Plate Finish 536 - Product No. BK - Insert Colour
 AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, BN Black Nickel, SS Stainless Steel.



520

Ingot Fan Isolation Switch

520 10A Ingot 3 Pole Fan Isolation Plate Switch

This Product Is Not Modular



522

523

722

723

Ingot 20A Control Switches With Optional Flex Outlet

522 20A Ingot DP Switch

523 20A Ingot DP Switch With Neon

Ingot 20A Control Switches Without Flex Outlet

722 20A Ingot DP Switch

723 20A Ingot DP Switch With Neon

Standards: BS EN 60669-2-4 BS EN 60669-1
 Back Box Depth (mm): 10A: 16 20A: 25 Cable Size (mm²): 10A: 4 x 1.5 or 2 x 2.5 20A: 3 x 2.5
 Dimensions (mm): 1 Gang: 88 (W) x 88 (H) x 8 (D)

Understanding the code: Please note: AB & BN are only available with Black inserts. SC & SS Ingot are available with Grey Inserts
 DP - Plate Style BN - Plate Finish 536 - Product No. BK - Insert Colour
 AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, BN Black Nickel, SS Stainless Steel.



500

501

504



502

503

505

Ingot 45A Switches And Socket Outlets

500 45A Ingot 1 Gang DP Switch

501 45A Ingot 1 Gang DP Switch With Neon

502 45A Ingot 2 Gang DP Switch

503 45A Ingot 2 Gang DP Switch With Neon

504 45A Ingot 2 Gang DP Switch With 13A DP Switched Socket

505 45A Ingot 2 Gang DP Switch With 13A DP Switched Socket & Neons

Standards: 500 501 502 503: BS EN 60669-1 504 505: BS 4177
 Back Box Depth (mm): 35 Cable Size (mm²): 45A: 1 x 16
 Dimensions (mm): 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D) 502 503: 88 (W) x 146 (H) x 8 (D)

Understanding the code: Please note: AB & BN are only available with Black inserts. SC & SS Ingot are available with Grey Inserts
 DP - Plate Style BN - Plate Finish 536 - Product No. BK - Insert Colour
 AB Antique Brass, CH Polished Chrome, SC Satin Chrome, BN Black Nickel, SS Stainless Steel.



660

655

Two keys provided (Spare keys available: SP660).

Lockable Switches

660 20A Double Pole Key Lockable Switch

Ingot Lockable Sockets

655 13A Ingot 1 Gang DP Key Lockable Socket With Neon

Standards: BS EN 60669-1 655: BS 1363-2
 Back Box Depth (mm): 35 Cable Size (mm²): 3 x 2.5 or 2 x 4
 Dimensions (mm): 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D)

Understanding the code: Please note: AB & BN are only available with Black inserts. SC & SS Ingot are available with Grey Inserts
 DP - Plate Style BN - Plate Finish 536 - Product No. BK - Insert Colour
 AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, BN Black Nickel, SS Stainless Steel.



Television, Telephone & Data Sockets

The following pages contain details of Deco Plus® products designed to deal with handling data and media transfer through telephone, computer, television or radio.

RJ11 Outlet | UK Telephone outlets
 Satellite Socket Outlets | Coaxial Sockets



Twin outlets are 2 separate sockets and are not internally linked together.

RJ11 Telephone Outlets

115 Single RJ11 (Irish/US) Outlet

Telephone Outlets

120 Single Telephone Outlet - Master
121 Twin Telephone Outlet - Master

125 Single Telephone Outlet - Secondary
126 Twin Telephone Outlet - Secondary

Back Box Depth (mm): 16 115: 35
 Termination Type: IDC 115: Screw
 Dimensions (mm): 88 (W) x 88 (H) x 8 (D)

Understanding the code: Please note: AB & BN are only available with Black inserts. SC & SS Ingot are available with Grey Inserts
 DP - Plate Style BN - Plate Finish 536 - Product No. BK - Insert Colour
 AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, BN Black Nickel, SS Stainless Steel.



Non-isolated Coaxial Outlets (Unshielded)

065 Single Coaxial Outlet
066 Twin Coaxial Outlet

Isolated Coaxial Outlets (Unshielded)

158 Single Isolated Coaxial Outlet
159 Twin Isolated Coaxial Outlet

Satellite Outlets (Unshielded)

156 Non-isolated Single Satellite Outlet
157 Isolated Satellite & Isolated Coaxial Outlet
170 Non-isolated Satellite & Non-isolated Coaxial Outlet

Isolated outlets will filter out any interference.

If a 2 way signal is required, i.e. for use with satellite hard wire extensions, then a non-isolated outlet is required.

Back Box Depth (mm): 16
 Dimensions (mm): 88 (W) x 88 (H) x 8 (D)

Understanding the code: Please note: AB & BN are only available with Black inserts. SC & SS Ingot are available with Grey Inserts
 DP - Plate Style BN - Plate Finish 536 - Product No. BK - Insert Colour
 AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, BN Black Nickel, SS Stainless Steel.



Solutions for media cabling

Selecting from a range of module inserts covering all manner of media transfer, installers will now be able to configure their own arrangement of television, radio or satellite reception, plus speaker, telephone and data outlets. All modules can be inserted into single or double wall plates and fitted onto standard switch and socket boxes.



Unfurnished Plates

The furnished plate shown here contains a selection of both single and twin width New Media™ modules.

The New Media™ range provides the installer with ultimate flexibility, allowing you to mix and match the connections you have on your wall plate.

All modules are available in white or black finishes to complement any installation.



310

311

312



All plates supplied with black and white gaskets where applicable. Above are some examples of New Media™ modules we offer, please see our dedicated New Media™ section for more information on the range of modules available.

Unfurnished Plates - New Media™

- 310** 1 Gang New Media™ Unfurnished Plate - 1 Aperture
- 311** 1 Gang New Media™ Unfurnished Plate - 2 Apertures
- 312** 2 Gang New Media™ Unfurnished Plate - 4 Apertures

Standards: BS 5733

Back Box Depth (mm): Dependent On Modules Fitted

Dimensions (mm): 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D)

Understanding the code:

DP - Plate Style BN - Plate Finish 536 - Product No.

AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, BN Black Nickel, SS Stainless Steel.



WA375



WA370



MCP086

MCP085



WA671



WA672

For the complete range of back boxes see Essentials™ page N4.

Galvanised Boxes

- WA370** 1 + 1 35mm Deep Dual Accessory Box (Deco® Range Only)
- WA375** 1 + 2 35mm Deep Dual Accessory Box (Deco® Range Only)
- WA671** 1 Gang 25mm Deep Architrave Box With 60.3mm Hole Centres
- WA672** 2 Gang 25mm Deep Architrave Box With 120.6mm Hole Centres

Surface Mounting Boxes - Metal Clad Grey

- MCP085** 1 Gang 40mm Deep Mounting Box
- MCP086** 2 Gang 40mm Deep Mounting Box

Spacer Gaskets

- DP095BK** 1 Gang 10mm Spacer Gasket - Black
- DP095GY** 1 Gang 10mm Spacer Gasket - Grey
- DP095WH** 1 Gang 10mm Spacer Gasket - White
- DP096BK** 2 Gang 10mm Spacer Gasket - Black
- DP096GY** 2 Gang 10mm Spacer Gasket - Grey
- DP096WH** 2 Gang 10mm Spacer Gasket - White

Standards: BS 4662

Dimensions (mm): 085: 88 (W) x 88 (H) x 40 (D) 086: 146 (W) x 88 (H) x 40 (D)
 370: 168 (W) x 74 (H) x 35 (D) 375: 228 (W) x 74 (H) x 35 (D) 671: 30 (W) x 73 (H) x 25 (D)
 672: 30 (W) x 135 (H) x 25 (D) 095: 94.3 (W) x 94.3 (H) x 11 (D) 096: 154.3 (W) x 94.3 (H) x 11 (D)